

# DS-425

Weighing scale



**High precision weighing scale  
with user-friendly features,  
designed for a variety of  
applications**



# DS-425

Weighing scale

**Accurate, fast, functional and easy to use**




**Check weighing with filling function**



**Counting function**



**Selectable weight units (g, kg, oz or lb.)**

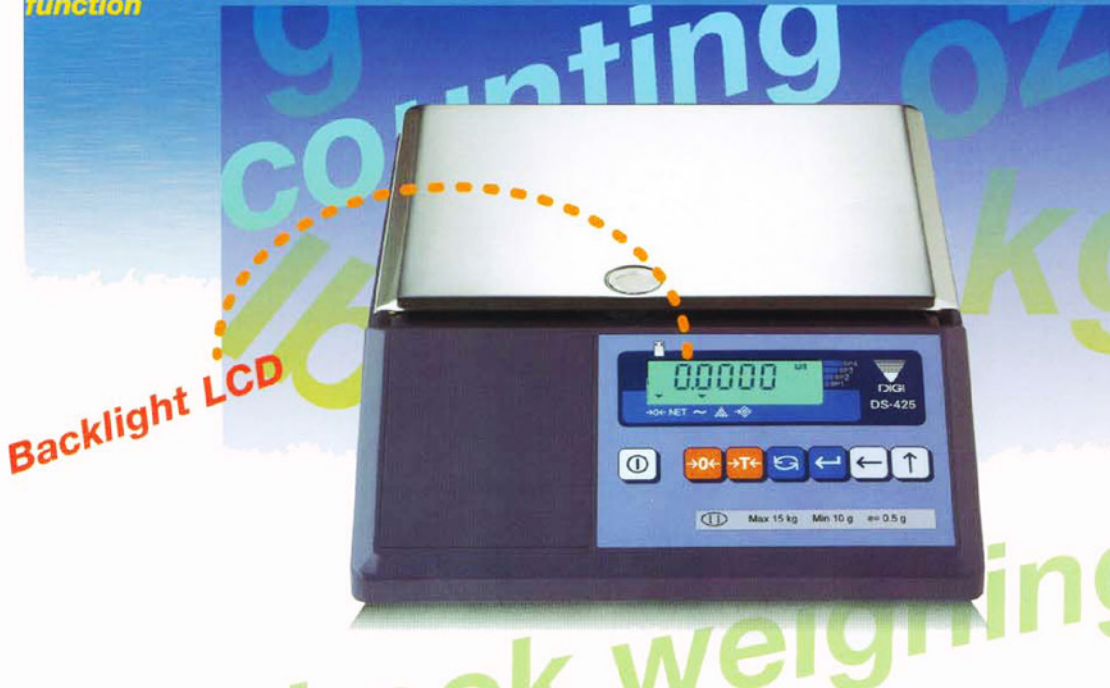

**Backlight LCD**

- **High display resolution: 1/30,000, resolution to 0.01g**
- **Standard RS-232C I/F** • **Digital tare subtraction**

### Specifications

#### Capacity and resolution

Capacity	Resolution	Tare range	Platter size
Max 300g	e=0.01g	T=-150.00g	105 × 160mm
Max 3kg	e=0.1g	T=-1500.0g	205 × 250mm
Max 15kg	e=0.5g	T=-7500.0g	205 × 250mm

Dimensions: 256(W) × 321(L) × 80(H) mm/  
10.08(W) × 12.64(L) × 3.15(H) inch

Internal resolution: 1/300,000  
 Display resolution: 1/30,000  
 Weight sensor: Load cell  
 Weight display: 5 digits  
 Power source: AC adapter (18VDC, 120mA)  
 Power consumption: 2 W  
 Operating temperature: 5°C to 35°C / 41°F to 95°F  
 Operating humidity: 85%RH Max. (Non-condensing)  
 Net weight: 3.5 kg / 7.71 lb  
 Standard RS-232C I/F with Din 8 pin connector

*\* Specifications are subject to change without notice.*

# CPSRSL

Un temps d'avance !

www.cpsrsl.fr